
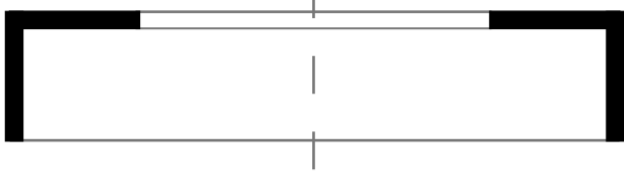

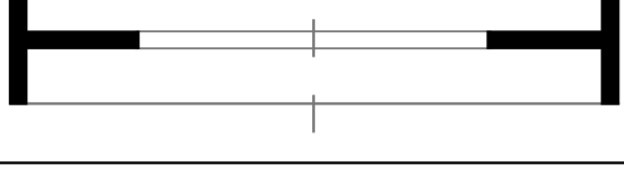


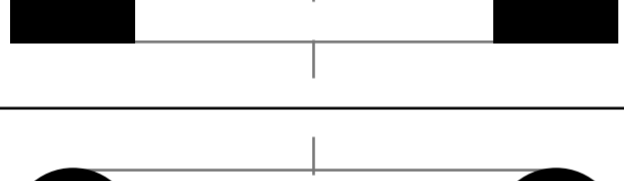









KAPACITETSTABELL

PROFILTYP MASKINSTORLEK	R-6-S med standardrullar R-6-S with standard rollers	R-6-S med specialrullar R-6-S with special rollers
	Max 140 X 15 Min 30 X 3	∅ 120 ∅ 500 Min 20 X 3 ∅ 300
	Max 120 X 12 Min 30 X 3	∅ 1200 ∅ 700 Min 20 X 3 ∅ 350
	Max 140 X 15 Min 25 X 3	∅ 1200 ∅ 460 Min ----- ∅ 300
	Max 120 X 15 Min 25 X 3	∅ 1200 ∅ 460 Min ----- ∅ 300
	Max 120 X 40 Min 30 X 3	∅ 1000 ∅ 450 Min ----- ∅ 250
	Max 250 X 40 Min -----	∅ 1000 ∅ 460 Min ----- ∅ 250
	Max 85 X 85 Min -----	∅ 900 ∅ 460 Min ----- ∅ 250
	Små profiler	Max 100 Min ----- ∅ 1000 ∅ 430
	Små profiler	Max 120 Min ----- ∅ 1200 ∅ 450
	Små profiler	Max INP 240 Min INP 80 ∅ 1100 ∅ 450
	Små profiler	Max UNP 240 Min UNP 60 ∅ 1100 ∅ 450
	Små profiler	Max UNP 240 Min UNP 60 ∅ 1100 ∅ 475
 	Endast med specialrullar	Max UNP / INP 140 Min UNP / INP 60 ∅ 6000 ∅ 2000

Rulldiameter / Dia bending rollers: 460mm
 Frammatningseffekt / Feedingpower: 20Hp
 Materialkvalité / Material quality: ST37